


HSM-EMV.SC 系列 电磁兼容电缆防水接头

HSM-EMV.SC Series Cable Gland

- 材料: 外部金属为黄铜镀镍 ;内部芯套为尼龙, 密封件材料为改性橡胶
- 防护等级: 在规定的卡口范围之内, 防护等级可以达到IP68
- 性能: 通过IEC-60077-1999抗振动和抗冲击试验, 通过RoHS认证, 已获得专利。
- 温度范围: -40℃到 100℃, 短时间可以达到 120℃
- Material: Body:nickel-plated brass Seal: Polyamide , Sealing:modified rubber
- Protection degree: Within the clamping range, its protection degree can reach IP68.
- Properties: succeed in the experiment of IEC-60077-1999 resistance to vibration and impact , passed RoHS, Patented.
- Temperature Range: Min-40℃, Max100℃, Short-term120℃

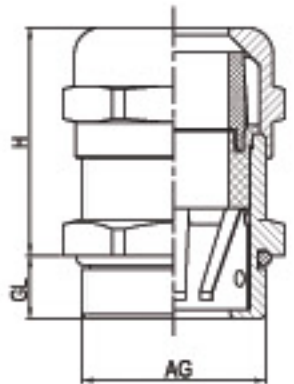


HSM-EMV.SC-M 公制螺纹 Metric Thread


型号规格	螺纹规格	卡口范围	螺纹外径	螺纹长度	H	扳手尺寸	穿线方式	包装单位
article No.	thread	clamping range	thread AG	thread length		wrench size	assembly	packet
	dimension	mm	mm	mm	mm	mm	type	units
HSM-EMV.SC-M12	M12 × 1.5	3~6.5	12	5	19	14	A / B	50
HSM-EMV.SC1-M12	M12 × 1.5	4~8	12	5	22	20	A	50
HSM-EMV.SC-M16	M16 × 1.5	4~8	16	6	21	17/18	A / B	50
HSM-EMV.SC1-M16	M16 × 1.5	6~10	16	6	24	22	A	50
HSM-EMV.SC-M20	M20 × 1.5	7~12	20	7	23.5	22	A / B	50
HSM-EMV.SC1-M20	M20 × 1.5	9~14	20	7	27	26	A	50
HSM-EMV.SC-M25	M25 × 1.5	11~16	25	7	24.5	28	A / B	25
HSM-EMV.SC1-M25	M25 × 1.5	13~18	25	7	28.5	30	A	25
HSM-EMV.SC-M32	M32 × 1.5	15~21	32	8	28	36	A / B	20
HSM-EMV.SC1-M32	M32 × 1.5	17~24	32	8	33	38	A	20
HSM-EMV.SC-M40	M40 × 1.5	21~30	40	9	38	45	A / B	10
HSM-EMV.SC1-M40	M40 × 1.5	22~32	40	9	34	50	A	10
HSM-EMV.SC-M50	M50 × 1.5	30~38	50	9	40	55/58	A / B	10
HSM-EMV.SC1-M50	M50 × 1.5	30~40	50	9	37	58	A	10
HSM-EMV.SC-M63	M63 × 1.5	37~44	63	10	41.5	65/70	A / B	5
HSM-EMV.SC1-M63	M63 × 1.5	38~53	63	10	48	75	A	5

注: HSM-EMV.SC1 适用形式 A 的穿线方式。
HSM-EMV.SC 适用形式 A, 形式 B 的穿线方式。

Note: The assembly type for HSM-EMV.SC1 is type A.
The assembly type for HSM-EMV.SC is type A or B.

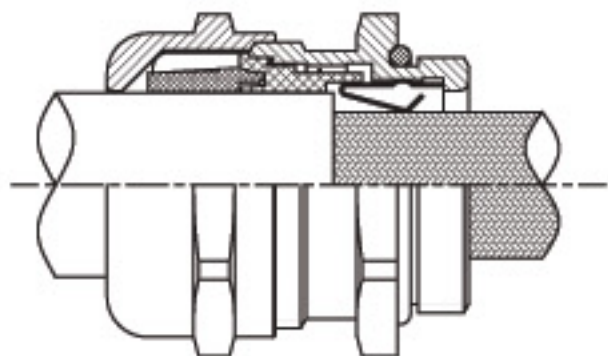

形式 A type A

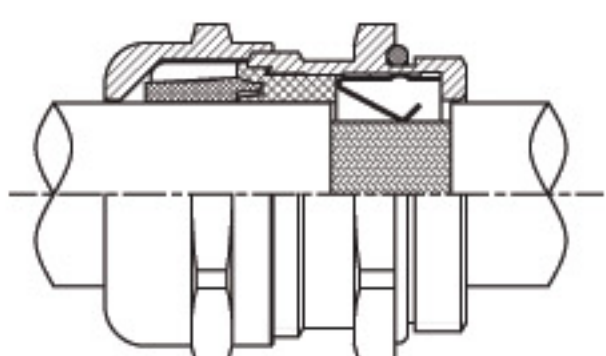


形式 B type B

安装示意图
Assembly Delineation

HSM-EMV.SC 系列 电磁兼容电缆防水接头

HSM-EMV.SC Series cable gland

- 材料: 外部金属为黄铜镀镍; 内部芯套为尼龙; 密封件材料为改性橡胶
- 防护等级: 在规定的卡口范围之内, 防护等级可以达到 IP68
- 性能: 通过 IEC-60077-1999 抗振动和抗冲击试验, 通过 RoHS 认证, 已获得专利。
- 温度范围: -40℃ 到 100℃, 短时间可以达到 120℃
- Material: Body: nickel-plated brass Seal: Polyamide, Sealing: modified rubber
- Protection degree: Within the clamping range, its protection degree can reach IP68.
- Properties: succeed in the experiment of IEC-60077-1999 resistance to vibration and impact, passed RoHS, Patented.
- Temperature Range: Min-40℃, Max100℃, Short-term120℃

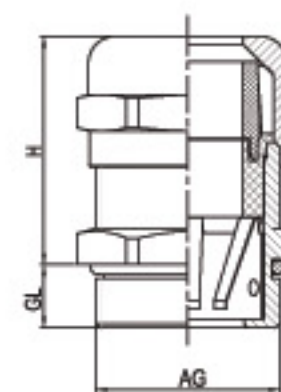


HSM-EMV.SC-P PG 螺纹 PG Thread


型号规格	螺纹规格	卡口范围	螺纹外径	螺纹长度	H	扳手尺寸	穿线方式	包装单位
article No.	thread	clamping range	thread AG	thread length		wrench size	assembly	packet
	dimension	mm	mm	mm	mm	mm	type	units
HSM-EMV.SC-P07	PG7	3~6.5	12.5	5	19	14	A / B	50
HSM-EMV.SC1-P07	PG7	4~8	12.5	5	22	20	A	50
HSM-EMV.SC-P09	PG9	4~8	15.2	6	21	17	A / B	50
HSM-EMV.SC1-P09	PG9	7~10	15.2	6	24	22	A	50
HSM-EMV.SC-P11	PG11	4~8	18.6	6	21	17/20	A / B	50
HSM-EMV.SC1-P11	PG11	6~10	18.6	6	24	22	A	50
HSM-EMV.SC-P13.5	PG13.5	7~12	20.4	7	23.5	22	A / B	50
HSM-EMV.SC1-P13.5	PG13.5	9~14	20.4	7	27	26	A	50
HSM-EMV.SC-P16	PG16	7~12	22.5	7	23.5	22/24	A / B	50
HSM-EMV.SC1-P16	PG16	9~14	22.5	7	27	26	A	50
HSM-EMV.SC-P21	PG21	11~16	28.3	7	24.5	28/30	A / B	25
HSM-EMV.SC1-P21	PG21	13~18	28.3	7	28.5	30	A	25
HSM-EMV.SC-P29	PG29	15~21	37	8	28	36/40	A / B	20
HSM-EMV.SC1-P29	PG29	17~24	37	8	33	38/40	A	20
HSM-EMV.SC-P36	PG36	21~30	47	9	38	45/50	A / B	10
HSM-EMV.SC1-P36	PG36	22~32	47	9	34	50	A	10
HSM-EMV.SC-P42	PG42	30~38	54	9	40	58	A / B	10
HSM-EMV.SC1-P42	PG42	30~40	54	9	37	58	A	10
HSM-EMV.SC-P48	PG48	37~44	59.3	10	41.5	65	A / B	5
HSM-EMV.SC1-P48	PG48	38~53	59.3	10	48	75	A	5

注: HSM-EMV.SC1 适用形式 A 的穿线方式。
HSM-EMV.SC 适用形式 A, 形式 B 的穿线方式。

Note: The assembly type for HSM-EMV.SC1 is type A.
The assembly type for HSM-EMV.SC is type A or B.

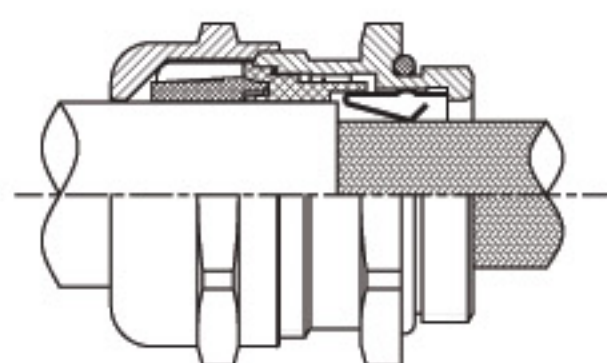

形式 A type A

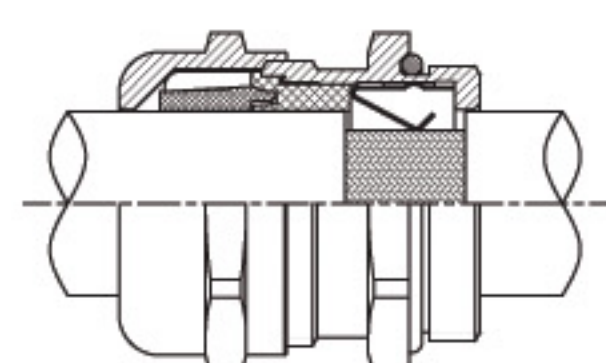

形式 B type B

安装示意图
Assembly Delineation