



电缆密封环 Rubber Grommet



产品特性 Product features

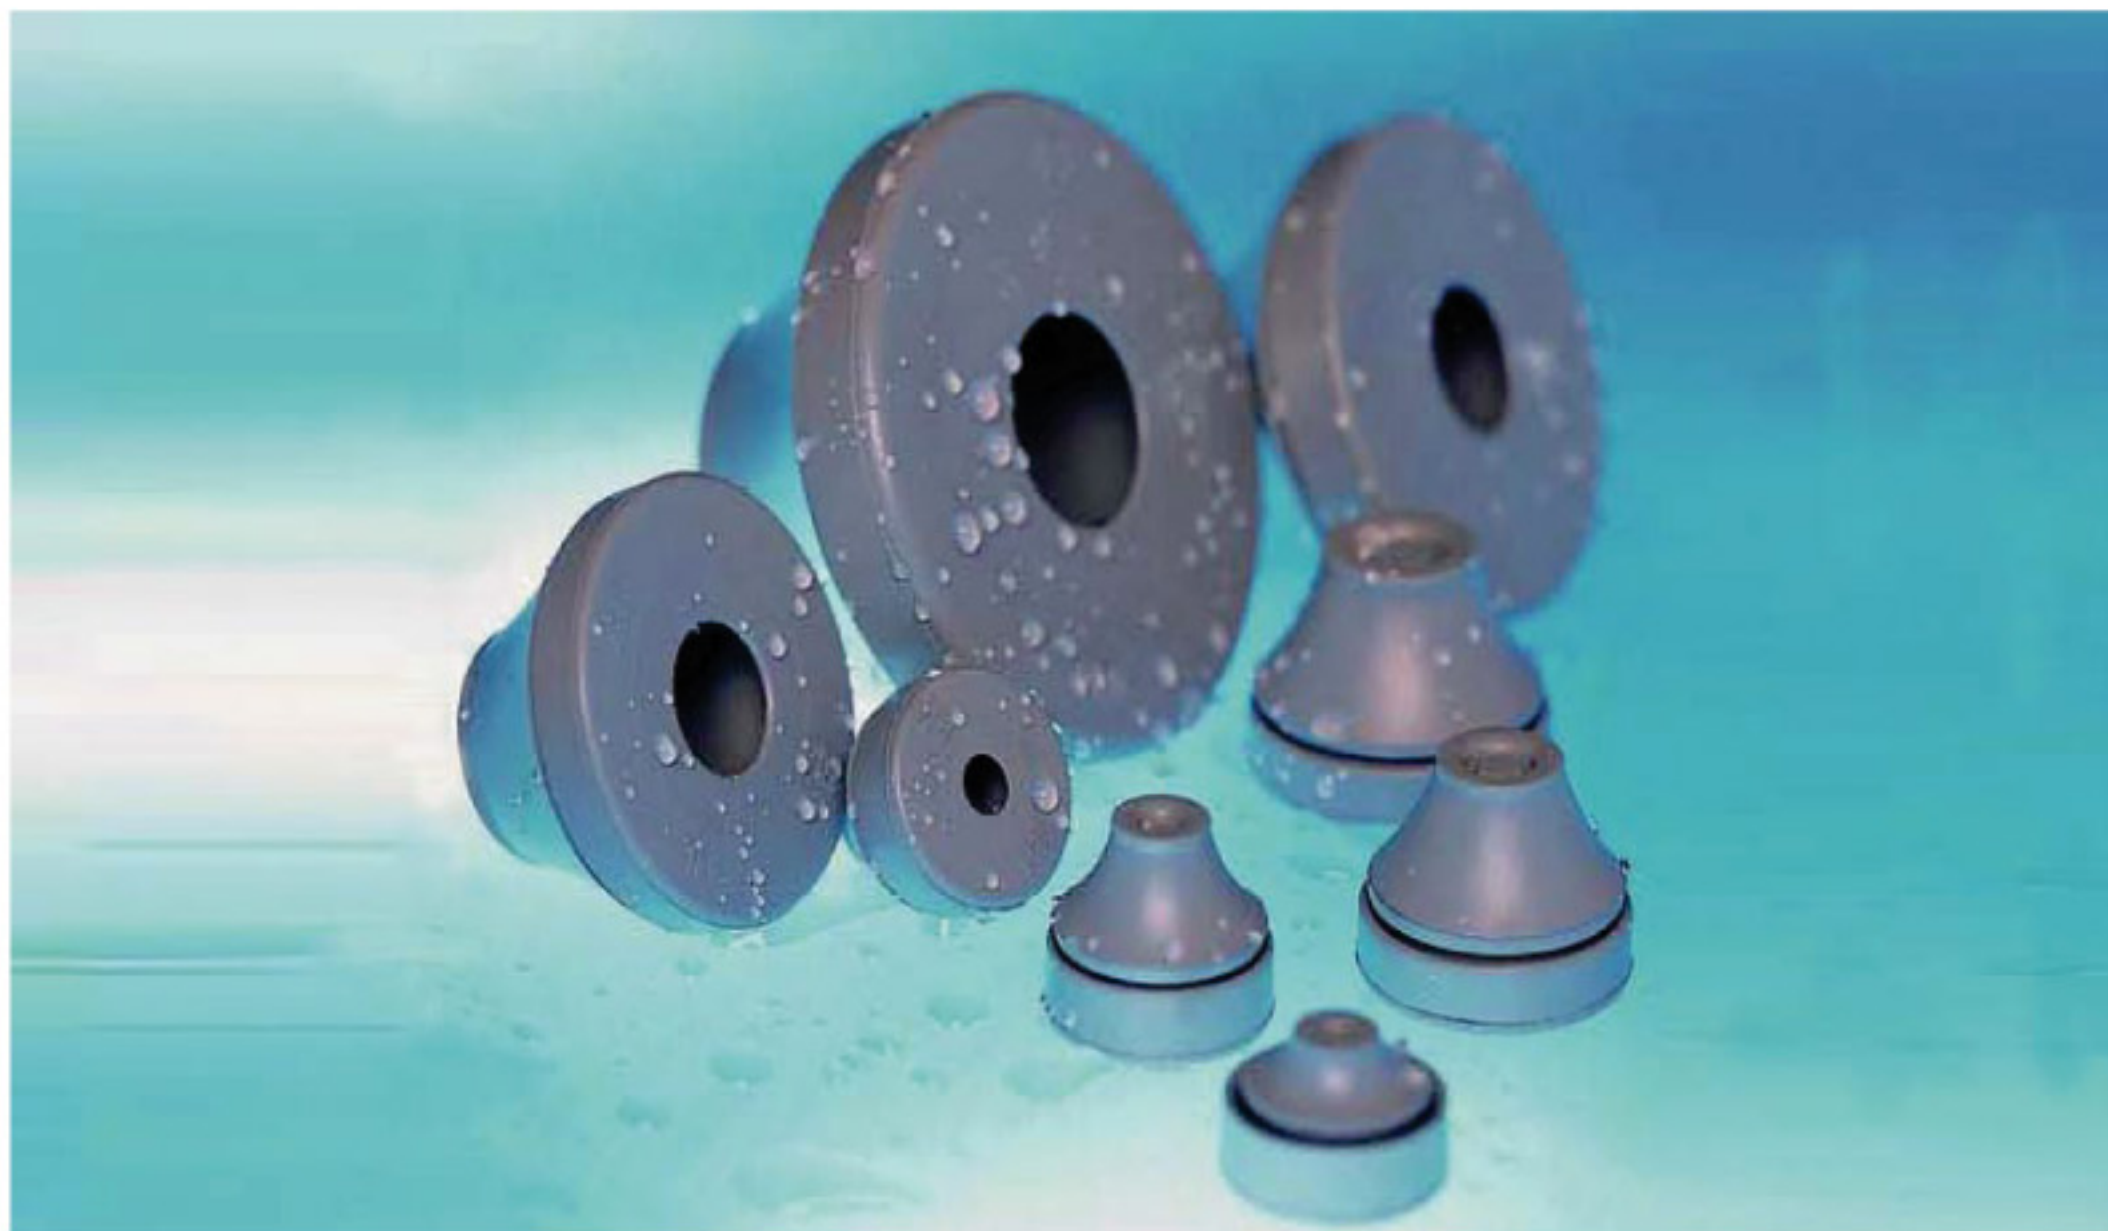

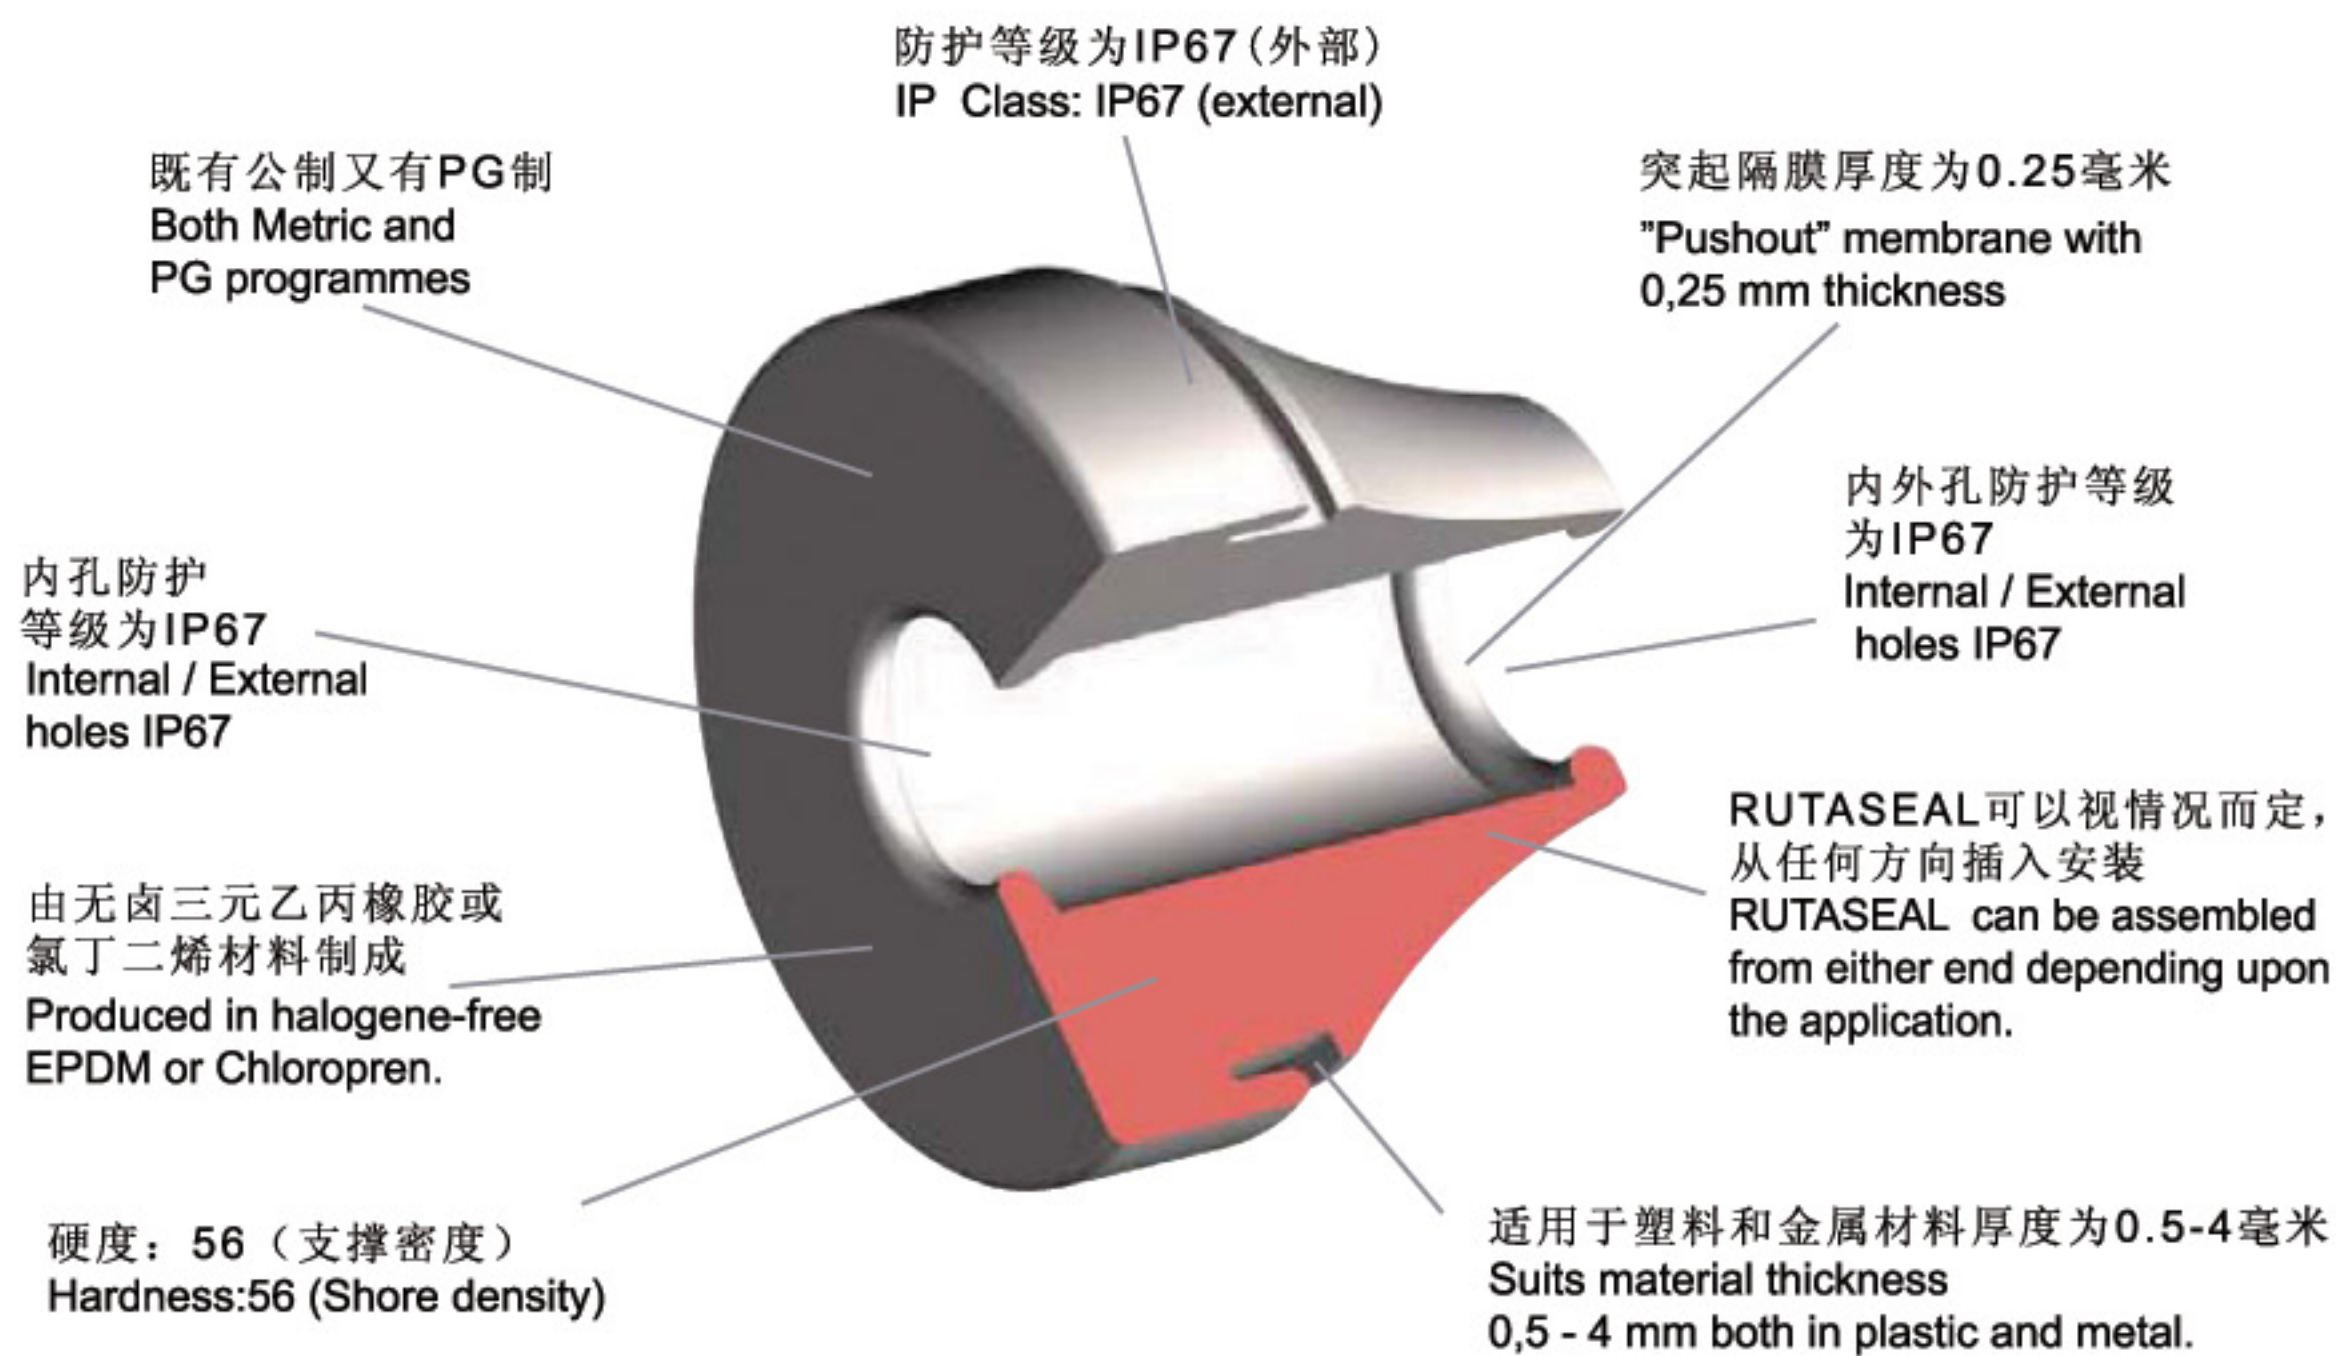

材料：三元乙丙橡胶, 抗化学制品, 耐气候
适用于厚度为0.5-4毫米的材料上的
孔, 无需使用工具即可快速简便的安装



防护等级: IP67 (根据EN60529)

温度范围: -40°C 到 +110°C

测试标准: SEMKO 44: 1984

SEMKO报告: 0211038/01-07

无卤

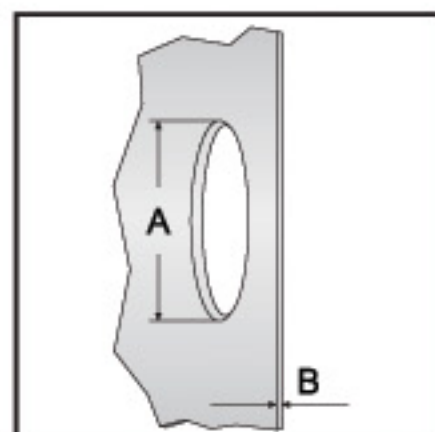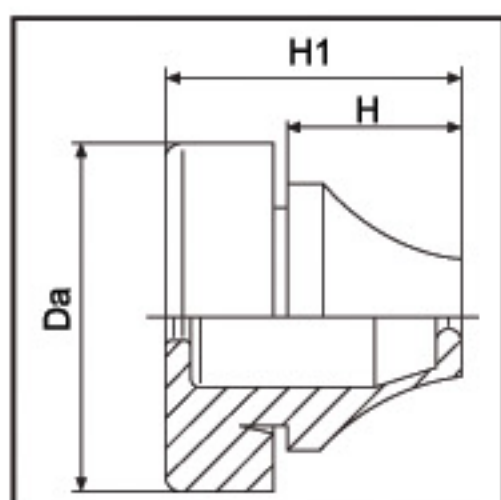

Material

EPDM

Resistant to chemicals and
weatherproof.

Suitable for holes in materials of
0,5 - 4 mm thickness.

Quick and simple assembly without the
use of tools.

Mode of protection:

IP67 acc. to EN 60529

Temperature range: -40°C....+110°C

Test standard: SEMKO 44:1984

Semko report: 0211038/01-07

Halogen-Free

RG电缆密封环公制 Rubber Grommet Metric

规格型号 Article no.			螺纹规格	卡口范围	A	B	Da	H	H1	包装单位
■ 浅灰色	■ 黑色	□ 灰白色	Size	For cable/ pipe ϕ mm	mm	mm	mm	mm	mm	Pcs pack
Light grey	Black	Grey White								
RAL 7001	RAL 9005	RAL 7035								
RG-M12LG	RG-M12B	RG-M12G	M12	4-7	12.5	0.5-2	20	5.6	12.8	50
RG-M16LG	RG-M16B	RG-M16G	M16	5-9	16.5	1-4	21	11	17.7	50
RG-M20LG	RG-M20B	RG-M20G	M20	8-13	20.5	1-4	25.5	13.4	20	50
RG-M25LG	RG-M25B	RG-M25G	M25	11-17	25.5	1-4	30.5	15.3	21.3	50
RG-M32LG	RG-M32B	RG-M32G	M32	15-20	32.5	1-4	38.5	18.6	24.6	25
RG-M40LG	RG-M40B	RG-M40G	M40	19-28	40.5	1-4	48.5	21.7	29.5	25
RG-M50LG	RG-M50B	RG-M50G	M50	27-35	50.5	1-4	60.5	25	34.8	10

RG电缆密封环PG制 Rubber Grommet Metric PG

规格型号 Article no.			螺纹规格	螺纹外径	卡口范围	A	B	Da	H	H1	包装单位
■ 浅灰色	■ 黑色	□ 灰白色	Size	Thread AD mm	For cable/ pipe ϕ mm	mm	mm	mm	mm	mm	Pcs pack
Light grey	Black	Grey White									
RAL 7001	RAL 9005	RAL 7035									
RG-P07LG	RG-P07B	RG-P07G	PG7	12.5	3-5	13	0.5-2	20	5.4	12.6	50
RG-P09LG	RG-P09B	RG-P09G	PG9	15.2	5-7	16	1-4	21	10.3	17.8	50
RG-P11LG	RG-P11B	RG-P11G	PG11	18.6	7-10	19	1-4	24	12.7	19.8	50
RG-P16LG	RG-P16B	RG-P16G	PG16	22.5	10-14	23	1-4	28	14.7	21.6	50
RG-P21LG	RG-P21B	RG-P21G	PG21	28.3	14-20	29	1-4	35	17.6	24.6	25
RG-P29LG	RG-P29B	RG-P29G	PG29	37.0	20-26	38	1-4	46	20	28.5	25
RG-P36LG	RG-P36B	RG-P36G	PG36	47.0	26-35	48	1-4	58	23.9	34.9	10

为什么选择电缆密封环代替塑料电缆接头？

- 受天气、紫外线和臭氧影响较小-更少发生变干、开裂和变松的情况。
- 更强的防酸能力（磷、硝石、盐酸和硫酸）
- 比大多数电缆接头有更大的温度范围。
- 只需在一面安装，快速简单-不需要到另一面安装螺母。
- 当空间狭小的情况下很理想-突出部分较少，所需空间小。
- 更符合生物工程学，对手腕没有负作用，因为不需要把它旋进位置。
- 高达IP67的防护等级，优于电缆接头，除非带锁紧功能非常重要。与电缆接头相比安装更省时省力-从而降低成本。
- 直到隔膜被推出开口都是密封的-无需闷盖，节省了成本。
- 更经济的解决方法。
- 节约更多时间



仪器仪表 apparatus

Why choose a rubber grommet instead of a plastic cable gland?

1. Less affected by weather, UV-light and ozone – less inclined to dry up, crack and come lose.
2. More resistant to acids (Phosphoric, Saltpeter, Hydrochloric & Sulphuric).
3. Handles larger temperature span than most glands.
4. Quick and easy installation from one side only — not necessary to be able to reach opposite side of installation to attach locknut.
5. Ideal where space is restricted - less protrusion and space needed.
6. Ergonomically better, no negative effect on wrists since it does not need to be screwed into place.
7. Superior to cable gland up to IP67, except where strain relief is at a premium. Less work and time needed for installation compared to a cable gland - thus lower cost.
8. The opening is always sealed until the membrane is pushed out – no need for stop plugs or blind plugs in the mean time, which creates extra costs.
9. More economic solution.
10. Save more time.

电缆密封环RG的安装方法 How to install RG



Push the grommet into the hole.
将电缆密封环推入孔中。




Pierce the grommet with the cable.
用电缆刺破电缆密封环




The grommet is the locked in position
by pulling it back about a centimetre
将电缆向后拉一厘米，电缆密封环就被锁在固定位置。

电缆密封环TSS的安装方法 How to install TSS

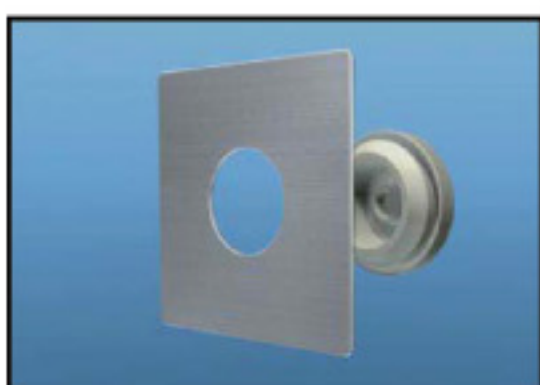

将电缆密封环推入孔中
Push the grommet into the hole.

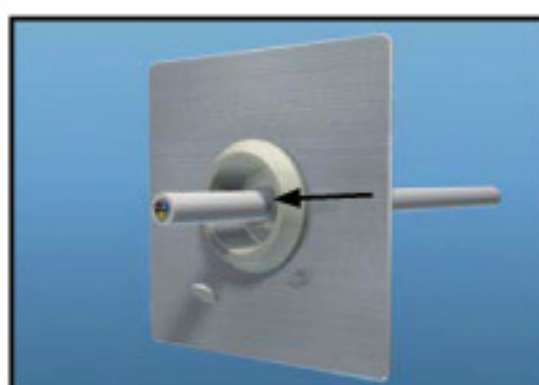

用电缆刺破电缆密封环
Pierce the grommet with the cable.

